

HSNO. 637592

REPORT NUMBER: 131-MGA-05-003

**SAFETY COMPLIANCE TESTING FOR
FMVSS NO. 131
SCHOOL BUS PEDESTRIAN SAFETY DEVICES**

**Girardin Minibus Inc.
2005 Girardin Minibus
NHTSA No. C50902**

**PREPARED BY:
MGA RESEARCH CORPORATION
5000 WARREN ROAD
BURLINGTON, WI 53105**




Final Report Date: February 2, 2005

FINAL REPORT


**PREPARED FOR:
U.S. DEPARTMENT OF TRANSPORTATION
NATIONAL HIGHWAY TRAFFIC SAFETY ADMINISTRATION
ENFORCEMENT
OFFICE OF VEHICLE SAFETY COMPLIANCE
400 SEVENTH STREET, SW, ROOM 6115 (NVS-220)
WASHINGTON, D.C. 20590**

This publication is distributed by the U.S. Department of Transportation, National Highway Traffic Safety Administration, in the interest of information exchange. The opinions, findings and conclusions expressed in this publication are those of the author(s) and not necessarily those of the Department of Transportation or the National Highway Traffic Safety Administration. The United States Government assumes no liability for its contents or use thereof. If trade or manufacturers' names or products are mentioned it is only because they are considered essential to the object of the publication and should not be construed as an endorsement. The United States Government does not endorse products or manufacturers.

Prepared by:  Date: February 2, 2005
Jim Hansen, Program Manager

Reviewed by:  Date: February 2, 2005
John Roberts, Project Engineer

FINAL REPORT ACCEPTED BY:

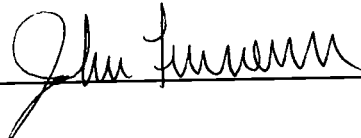
2/8/05
Date of Acceptance

Technical Report Documentation Page

| | | | | | |
|---|--|---|--|----------------------------|--|
| 1. Report No. 131-MGA-05-003 | | 2. Government Accession No. | | 3. Recipient's Catalog No. | |
| 4. Title and Subtitle Final Report of FMVSS 131 Compliance Testing of 2005 Girardin Minibus School Bus NHTSA No.: C50902 | | 5. Report Date February 2, 2005 | | | |
| | | 6. Performing Organization Code MGA | | | |
| 7. Author(s) Jim Hansen, Program Manager John Roberts, Project Engineer | | 8. Performing Organization Report No. 131-MGA-05-003 | | | |
| 9. Performing Organization Name and Address MGA Research Corporation 5000 Warren Road Burlington, WI 53105 | | 10. Work Unit No. | | | |
| | | 11. Contract or Grant No. DTNH22-02-R-01057 | | | |
| 12. Sponsoring Agency Name and Address U.S. Department of Transportation National Highway Traffic Safety Administration; Enforcement Office of Vehicle Safety Compliance (NVS-220) 400 Seventh St., S.W. Room 6115 Washington, D.C. 20590 | | 13. Type of Report and Period Covered Final Report 1/11/2005 – 2/2/2005 | | | |
| | | 14. Sponsoring Agency Code NVS-220 | | | |
| 15. Supplementary Notes | | | | | |
| 16. Abstract Compliance tests were conducted on the subject, 2005 Girardin Minibus School Bus NHTSA No. C50902, in accordance with the specifications of the Office of Vehicle Safety Compliance Test Procedure No. TP-131SB-01 for the determination of FMVSS 131 compliance. Test failures identified were as follows: None | | | | | |
| 17. Key Words Safety Bus Compliance Testing Safety Engineering FMVSS 131 | | | 18. Distribution Statement Copies of this report are available from: National Highway Traffic Safety Admin., Technical Information Services (TIS), Room 2336 (NPO-405) 400 Seventh Street, S.W. Washington, D.C. 20590 | | |
| 19. Security Classif. (of this report) Unclassified | 20. Security Classif. (of this page) Unclassified | 21. No. of Pages 25 | 22. Price | | |

TABLE OF CONTENTS

| <u>Section</u> | | <u>Page No</u> |
|----------------|--|----------------|
| 1 | Purpose of Compliance Test | 1 |
| 2 | Test Data Summary | 2 |
| 3 | Compliance Test Data | 4 |
| | Data Sheet 1- Dimensions of Stop Signal Arm (S5.1) | 5 |
| | Data Sheet 2 – Surface Content and Labeling (S5.2) | 6 |
| | Data Sheet 3 – Conspicuity (S5.3) | 7 |
| | Data Sheet 4 - Stop Signal Arm Installation (S5.4) | 10 |
| | Data Sheet 5 - Stop Signal Arm Operation (S5.5) | 11 |
| 4 | Instrumentation and Equipment List | 12 |
| 5 | Photographs | 13 |

SECTION 1
PURPOSE OF COMPLIANCE TEST

Tests were conducted by the MGA Research Corporation-Wisconsin Operations on a 2005 Girardin Minibus School Bus, NHTSA No. C50902, in accordance with the specifications of the Office of Vehicle Safety Compliance (OVSC) Test Procedures TP-131SB-01 to determine compliance to the requirements of Federal Motor Vehicle Safety Standard (FMVSS) 131, "School Bus Pedestrian Safety Devices."

This program is sponsored by the National Highway Traffic Safety Administration (NHTSA), under Contract No. DTNH22-02-D-01057.

SECTION 2
TEST DATA SUMMARY

Based on the tests performed, the 2005 Girardin Minibus School Bus, NHTSA No. C50902, appears to meet all of the requirements of FMVSS 131. See Test Summary Data Sheet on the following page.

FMVSS 131, SCHOOL BUS PEDESTRIAN SAFETY DEVICES
VEHICLE INFORMATION AND TEST SUMMARY

Test Vehicle: **2005 Girardin Minibus School Bus**
 Test Lab: **MGA Research-Wisconsin Operations**

NHTSA No.: **C50902**
 Test Date: **1/11/05**

| | | | |
|----------------------------------|-------------------|--------------------|-------------|
| VIN | 1FDSE35L85HA02436 | Chassis Cab | Yes |
| No. of Stop Signal Arms | 1 | Forward Control | No |
| Pass. Capacity (driver included) | 19 | Rear Engine | No |
| Stop Signal Arm Manufacturer | BMR Manufacturing | Tire Size (on bus) | LT245/75R16 |

DATA FROM CERTIFICATION LABEL

| | | | |
|---------------------------------|--------------------|-----------------|---------|
| Final Stage Manufacturer | Girardin | Date of Mfg. | 09/2004 |
| Incomplete Vehicle Manufacturer | Ford Motor Company | Date of Mfg. | 08/2004 |
| GVWR (kg) | 4354 | GAWR Front (kg) | 2086 |
| | | GAWR Rear (kg) | 2759 |

TEST SUMMARY

| | Pass/Fail or N/A |
|---|------------------|
| Dimensional Requirements (S5.1) | PASS |
| Surface Content and Labeling (S5.2) | PASS |
| Conspicuity Requirements (S5.3) | PASS |
| Location and Position Requirements (S5.4) | PASS |
| Arm Operation Requirements (S5.5) | PASS |

SECTION 3
COMPLIANCE TEST DATA

**FMVSS 131 – DATA SHEET 1
DIMENSIONS OF STOP SIGNAL ARM (S5.1)**

Test Vehicle: **2005 Girardin Minibus School Bus**
Test Lab: **MGA Research-Wisconsin Operations**

NHTSA No.: **C50902**
Test Date: **1/11/05**

"Regular octagon" with diameter of at least 450 mm (point to point).

| | Forward Signal Arm (mm) | Rearmost Signal Arm (mm) |
|---------------------|-------------------------|--------------------------|
| Diameter 1 | 495 | --- |
| Diameter 2 | 496 | --- |
| Diameter 3 | 495 | --- |
| Diameter 4 | 496 | --- |
| Range (max. – min.) | 1 | --- |

| REQUIREMENTS | Yes, No, N/A |
|---|--------------|
| Are all octagon diameter values ≥ 450 mm? | Yes |
| Is range of octagon diameter values ≤ 12 mm? | Yes |
| Are all octagon chord dimensions equal within 6 mm? | Yes |

| Test Results | Pass/Fail |
|------------------------------------|-------------|
| S5.1 Dimensions of Stop Signal Arm | PASS |

Tested By:

Date: January 11, 2005

Approved By:

**FMVSS 131 – DATA SHEET 2
SURFACE CONTENT AND LABELING (S5.2)**

Test Vehicle: **2005 Girardin Minibus School Bus**
Test Lab: **MGA Research-Wisconsin Operations**

NHTSA No.: **C50902**
Test Date: **1/11/05**

| REQUIREMENTS | Forward Signal Arm | | Rearmost Signal Arm | |
|---|--------------------|----------|---------------------|----------|
| | Front Side | Aft Side | Front Side | Aft Side |
| Color RED except for border & legend (Yes/No) | YES | YES | --- | --- |
| Color of border is WHITE (Yes/No) | YES | YES | | --- |
| Color of word "STOP" is WHITE (Yes/No) | YES | YES | | --- |
| Word "STOP" is in upper case letters (Yes/No) | YES | YES | | --- |
| Width of border (≥ 12 mm) | 14 mm | 14 mm | | --- |
| Percent of border obscured by mounting brackets, clips, or bolts, or other components ($15\% \leq$) * | 0% | 14% | | --- |
| Height of letters (≥ 150 mm) | 152 mm | 152 mm | | --- |
| Stroke width of letters (≥ 20 mm) | 25 mm | 25 mm | | --- |


* = In addition to area obscured by 2 optional red lamps, if installed.

NOTE:

1. Front side of rearmost signal arm shall not contain any lettering or border.

| Test Results | | Pass/Fail |
|--------------|------------------------------|-------------|
| S5.2 | Surface content and labeling | PASS |

Tested By:

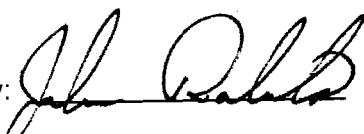

Approved By:



Date: January 11, 2005

**FMVSS DATA SHEET 3
CONSPICUITY (S5.3)**

Test Vehicle: **2005 Girardin Minibus School Bus**
Test Lab: **MGA Research-Wisconsin Operations**

NHTSA No.: **C50902**
Test Date: **1/11/05**

The Stop Signal Arm shall comply with either S5.3.1 or S5.3.2, or both.

REFLECTORIZED MATERIAL (S5.3.1)

| Requirements | Forward Signal Arm | | Rearmost Signal Arm | |
|---|--------------------|------------------|---------------------|----------|
| | Front Side | Aft Side | Front Side | Aft Side |
| Entire surface of stop signal arm reflectorized except for mounting brackets, clips, bolts, or other necessary components. Front side of rearmost stop signal arm must not be reflectorized. (Yes/No) | YES ¹ | YES ¹ | --- | --- |
| Percent of entire surface obscured by mounting brackets, clips, bolts or other components necessary for mechanical or electrical operation. (7.5% max. each side) | 0% ² | 4% ² | --- | --- |

Test Notes:

¹ Flashing lights prevent full reflectorization.

² Percentages do not include area obscured by red flashing lights.

**FMVSS 131 DATA SHEET 3...continued
CONSPICUITY (S5.3)**

Test Vehicle: **2005 Girardin Minibus School Bus**
Test Lab: **MGA Research-Wisconsin Operations**

NHTSA No.: **C50902**
Test Date: **1/11/05**

Optional Illuminated Lettering (S5.3.1.1)

| Item | Stop Signal Arm | |
|--|-----------------|----------|
| | Forward | Rearmost |
| Does the stop sign(s) have illuminated lettering? If optional illuminated lettering is installed, the following requirements apply in addition to reflectorized surface. | NO | --- |

| Requirements | Forward Signal Arm | | Rearmost Signal Arm | |
|---|--------------------|----------|---------------------|----------|
| | Front Side | Aft Side | Front Side | Aft Side |
| Only Red lamps used (Yes/No) | N/A | N/A | --- | --- |
| Red lamps form the complete shape of each letter of the legend. (Yes/No) | N/A | N/A | --- | --- |
| Red lamps centered within stroke of each letter (yes/No) or Red lamps outline each letter in immediately surrounding area (Yes/No) | N/A | N/A | --- | --- |
| The shape of each letter remains constant (Yes/No) | N/A | N/A | --- | --- |
| Net stroke width \geq 15 mm (stroke width minus lamp width) | "S" | N/A | N/A | --- |
| | "T" | N/A | N/A | --- |
| | "O" | N/A | N/A | --- |
| | "P" | N/A | N/A | --- |
| Lamps on each side of the signal arm flash (60-120 flashes/min.) | N/A | N/A | --- | --- |
| Lamps current "on" time of 30% to 75% of the total flash cycle | N/A | N/A | --- | --- |
| Total current "on" time for the two terminals shall be between 90-110% of the total flash cycle. | N/A | N/A | --- | --- |
| If Xenon short-arc lamps – "off" time before each flash of at least 50% of the total flash cycle. | N/A | N/A | --- | --- |

| Lamp Type | Filament |
|-----------|----------------------|
| | Gaseous Discharge |
| | Light emitting diode |

**FMVSS 131 DATA SHEET 3...continued
CONSPICUITY (S5.3)**

Test Vehicle: **2005 Girardin Minibus School Bus**
Test Lab: **MGA Research-Wisconsin Operations**

NHTSA No.: **C50902**
Test Date: **1/11/05**

RED FLASHING LAMPS (S5.3.2)

| Requirements | Forward Signal Arm | | Rearmost Signal Arm | |
|--|-----------------------------------|-----------------------------------|---------------------|----------|
| | Front Side | Aft Side | Front Side | Aft Side |
| Red lamps centered on the vertical centerline (At least 2, enter quantity) | 2 - YES | 2 - YES | --- | --- |
| One lamp at extreme top and another at extreme bottom (Yes/No) | YES | YES | --- | --- |
| Lamps on each side of the signal arm flash alternately (60-120 flashes/min.) | YES | YES | --- | --- |
| Lamps current "on" time of 30% to 75% of the total flash cycle. | YES | YES | --- | --- |
| Total current "on" time for two terminals shall be between 90 and 110% of the total flash cycle. | YES | YES | --- | --- |
| If Xenon short-arc lamps-"off" time before each flash of at least 50% of total flash cycle. | N/A | N/A | --- | --- |
| Symbol "DOT" on each lamp lens (Yes/No) | NO | NO | --- | --- |
| Additional markings on lamp lenses | SMC-194 FMVSS 131 SAE J1138 | SMC-194 FMVSS 131 SAE J1138 | --- | --- |

MARKINGS ON THE FLASHER

| | | | |
|-------|---------|--------------|---------|
| Make | Unknown | Serial No. | Unknown |
| Model | Unknown | Date of Mfg. | Unknown |

Test Notes:

| TEST RESULTS | | Pass/Fail or N/A |
|--------------|--------------------------------|------------------|
| S5.3.1 | Reflectorized Material | N/A |
| S5.3.1.1 | Optional Illuminated Lettering | N/A |
| S5.3.2 | Red Flashing Lamps | PASS |

Tested By: 

Approved By: 

Date: January 11, 2005

**FMVSS 131 DATA SHEET 4
STOP SIGNAL ARM INSTALLATION (S5.4)**


Test Vehicle: **2005 Girardin Minibus School Bus**
Test Lab: **MGA Research-Wisconsin Operations**

NHTSA No.: **C50902**
Test Date: **1/11/05**

Dimensions and angles measured with Signal Arm in the extended position.

| Requirements | Stop Signal Arm | |
|--|-----------------|----------|
| | Forward | Rearmost |
| Signal arm perpendicular to side of bus (Measure angle between vertical plane of side of bus and vertical plane of the signal arm.) $90 \pm 5^\circ$ | YES 86° | --- |
| Top edge of signal arm parallel to horizontal plane (Measure angle between vertical plane of side of bus and the top edge of the signal arm.) $90 \pm 5^\circ$ | YES 88.6° | --- |
| Top edge of signal arm not more than 152.4 mm from a horizontal plane tangent to lower edge of frame of passenger window immediately behind the driver's window. | | |
| Measure top corner closest to the school bus | 123 mm | --- |
| Measure top corner furthest from school bus | 127 mm | --- |
| Vertical centerline of signal arm not less than 228.6 mm away from side of bus | 365 mm | --- |
| Stop signal arm(s) installed on left side of bus (Yes, No, or Not Applicable) | YES | --- |

| TEST RESULTS | | Pass/Fail or N/A |
|--------------|------------------------------|------------------|
| S5.4 | Stop Signal Arm Installation | PASS |

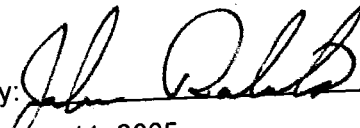Tested By: 
Date: January 11, 2005

Approved By: 

**FMVSS 131 DATA SHEET 5
STOP SIGNAL ARM OPERATION (S5.5)**

Test Vehicle: **2005 Girardin Minibus School Bus**
Test Lab: **MGA Research-Wisconsin Operations**

NHTSA No.: **C50902**
Test Date: **1/11/05**

Stop Signal Arm(s) shall be automatically extended, at a minimum, whenever the red signal lamps on the bus required by FMVSS 108 are activated; except that a manual override device may be installed that prevents automatic extension.


| Requirements | Stop Signal Arm | |
|---|-----------------|----------|
| | Forward | Rearmost |
| Signal Arm(s) automatically extended when red lights are activated and override device is not activated. (Yes, No, or Not Applicable) | YES | --- |
| If a MANUAL OVERRIDE DEVICE is installed, enter applicable data below: | | |
| Mechanism for activating the override device is within reach of the school bus driver (Yes/No) | N/A | --- |
| While the override device is activated; there is a continuous or intermittent signal audible to the driver unless equipped with optional cut-off timing device (Measure duration ≥ 10 min.) | N/A | --- |
| If audible signal is equipped with optional cut-off timing device, it sounds for at least 60 seconds while the manual override is activated. (Measure 3 times, duration ≥ 60 sec.) | N/A | --- |
| If audible signal is equipped with optional cut-off timing device, it automatically recycles every time the service entry door is opened while the engine is running and the manual override is engaged. (Recycle 3 times, Yes/No each cycle) | N/A | --- |

Describe location and mode of operation of the manual override control, if installed:

No manual override device was installed on this vehicle which allowed overhead lights to flash and stop signal arm NOT to extend.

| TEST RESULTS | | Pass/Fail or N/A |
|--------------|---------------------------|------------------|
| S5.5 | Stop Signal Arm Operation | PASS |

Tested By:

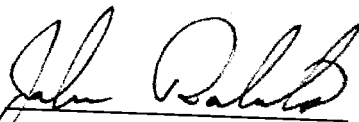

Date: January 11, 2005

Approved By:



SECTION 4
INSTRUMENTATION AND EQUIPMENT LIST

Test Vehicle: **2005 Girardin Minibus School Bus**
Test Lab: **MGA Research-Wisconsin Operations**

NHTSA No.: **C50902**
Test Date: **1/11/05**

Identify the instruments used during this test and record their make, model, serial number, range, accuracy, and calibration date.

| | Digital Caliper | Inclinometer | Tape Measure |
|--------------|-----------------|--------------------|--------------|
| Make | Starrett | Digital Protractor | Stanley |
| Model | 721 | Pro 360 | Powerlock |
| Serial # (s) | 00410129 | Complab | 167 |
| Range | 0 to 150 mm | 0 to 360 degrees | 0 to 8 m |
| Accuracy | 0.01 mm | 0.1 degree | 1 mm |
| Cal. Date | 8/26/04 | 7/29/04 | 8/13/04 |
| Cal. Due | 2/26/05 | 1/29/05 | 2/13/05 |

SECTION 5
PHOTOGRAPHS

TABLE OF PHOTOGRAPHS

| <u>Photo No.</u> | | <u>Page No.</u> |
|------------------|--|-----------------|
| 1 | 3/4 Frontal View from Left Side of Vehicle with Stop Signal Arm(s) Extended | 15 |
| 2 | Incomplete Vehicle Manufacturer's Certification Label | 16 |
| 3 | Vehicle Certification Label and Tire Placard | 17 |
| 4 | Front Close Up View of Stop Signal Arm | 18 |
| 5 | Back Close Up View of Stop Signal Arm | 19 |
| 6 | Close Up View of the Switches That Allow Extension of the Stop Signal Arm(s) | 20 |
| 7 | Switch Console Relative to the Driver Seating Position | 21 |

Test Vehicle: 2005 Girardin Mini Bus School Bus
Procedure: FMVSS 131

NHTSA No.: C50902



3/4 Frontal View from Left Side of Vehicle with Stop Signal Arm(s) Extended

NHTSA No. C50902



Incomplete Vehicle Manufacturer's Certification Label

Test Vehicle: 2005 Girardin Mini Bus School Bus
Procedure: FMVSS 131

NHTSA No.: C50902

MFB : Girardin Minibus Inc.
Charmoyville, Quebec, Canada

DATE OF MANUFACTURE: **SEPTEMBER 2004**
BODY NUMBER **05-23051**

INCOMPLETE VEH. MFGD BY **FORD** 08/04
GVW/GT **4600 LBS/4354 KG** RIM, TIRE CHOICE


GAWR-FRONT **4600LBS/ 2086 KG** WITH **LT245/75R16**
RIMS **16 X 7. OK @ 380KPA/55PSI** COLD SINGLE

GAWR-REAR **6084 LBS/2759 KG** WITH **LT245/75R16**
RIMS **16 X 7. OK @ 550KPA/80PSI** COLD SINGLE

THIS VEHICLE CONFORMS TO ALL APPLICABLE U.S.A.
FEDERAL MOTOR VEHICLE SAFETY STANDARDS IN EFFECTS
ON THE DATE OF MANUFACTURER


VEHICLE IDENTIFICATION NO. **1FDSE35L85HA02436**

CLASSIFICATION **SB**
01 DRIVER 18 AMBULATORY PASSENGERS



Test Vehicle: 2005 Girardin Mini Bus School Bus
Procedure: FMVSS 131


NHTSA No.: C50902

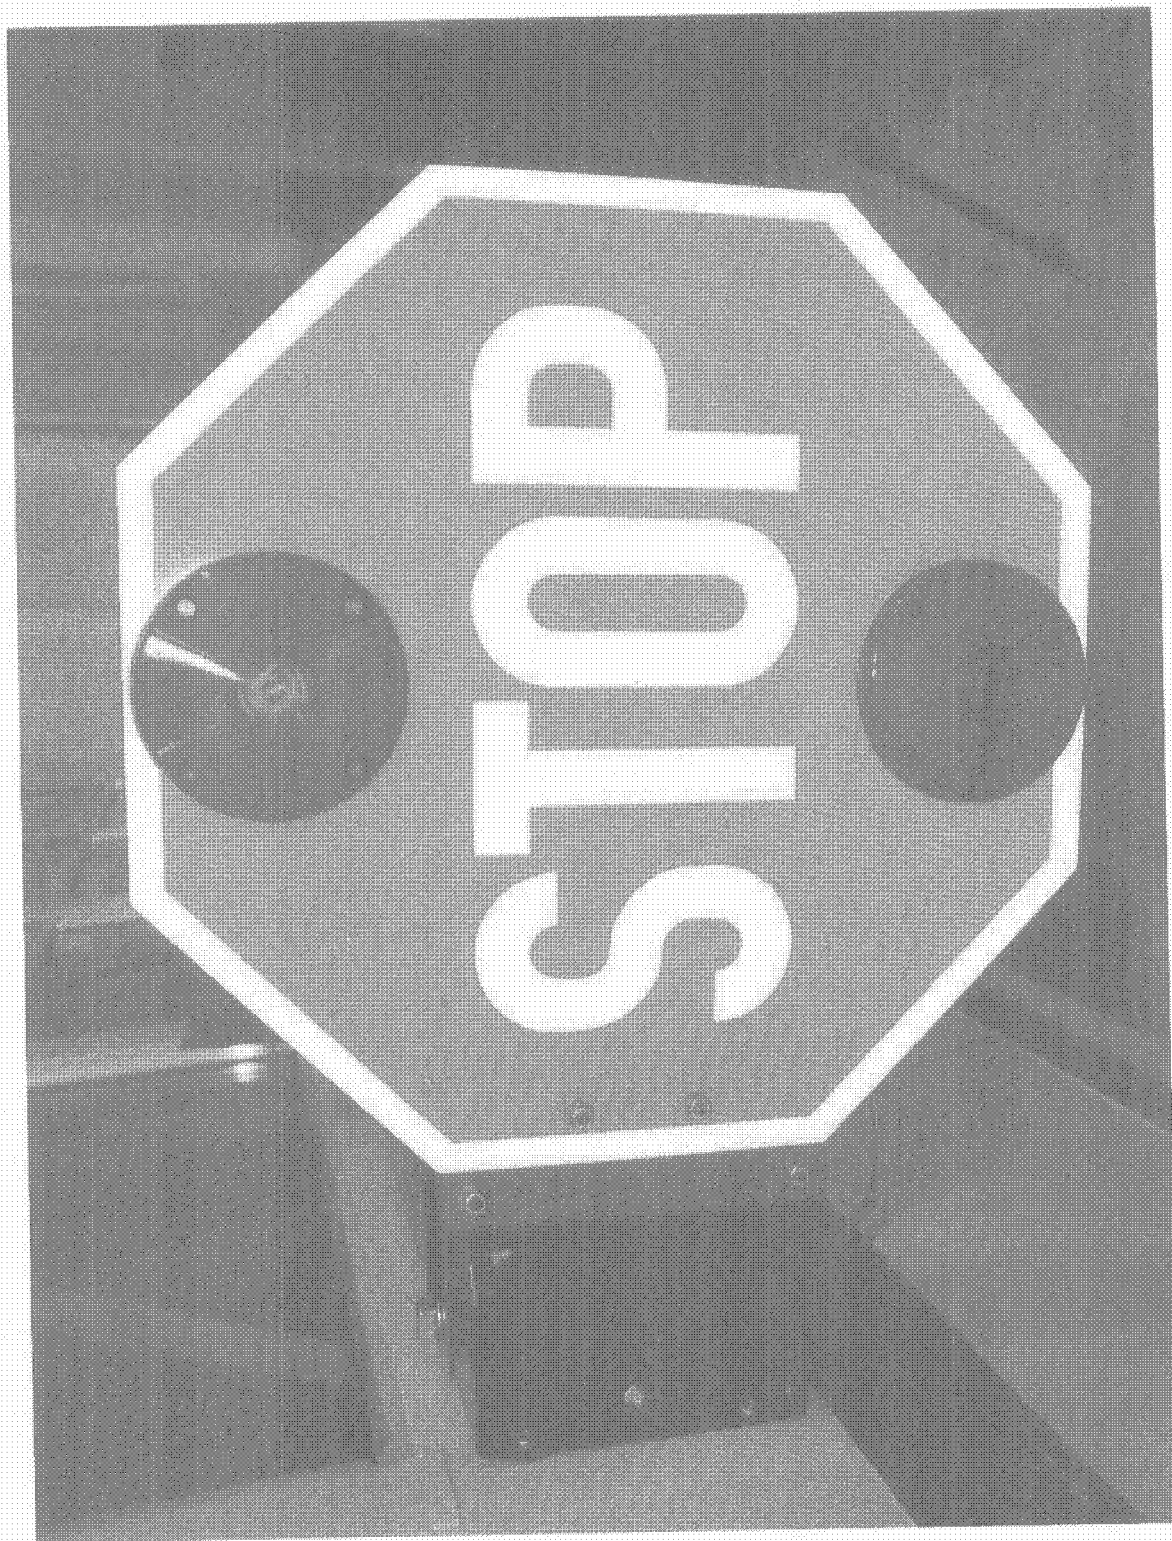

Front Close Up View of Stop Signal Arm

Test Vehicle: 2005 Girardin Mini Bus School Bus
Procedure: FMVSS 131

NHTSA No.: C50902

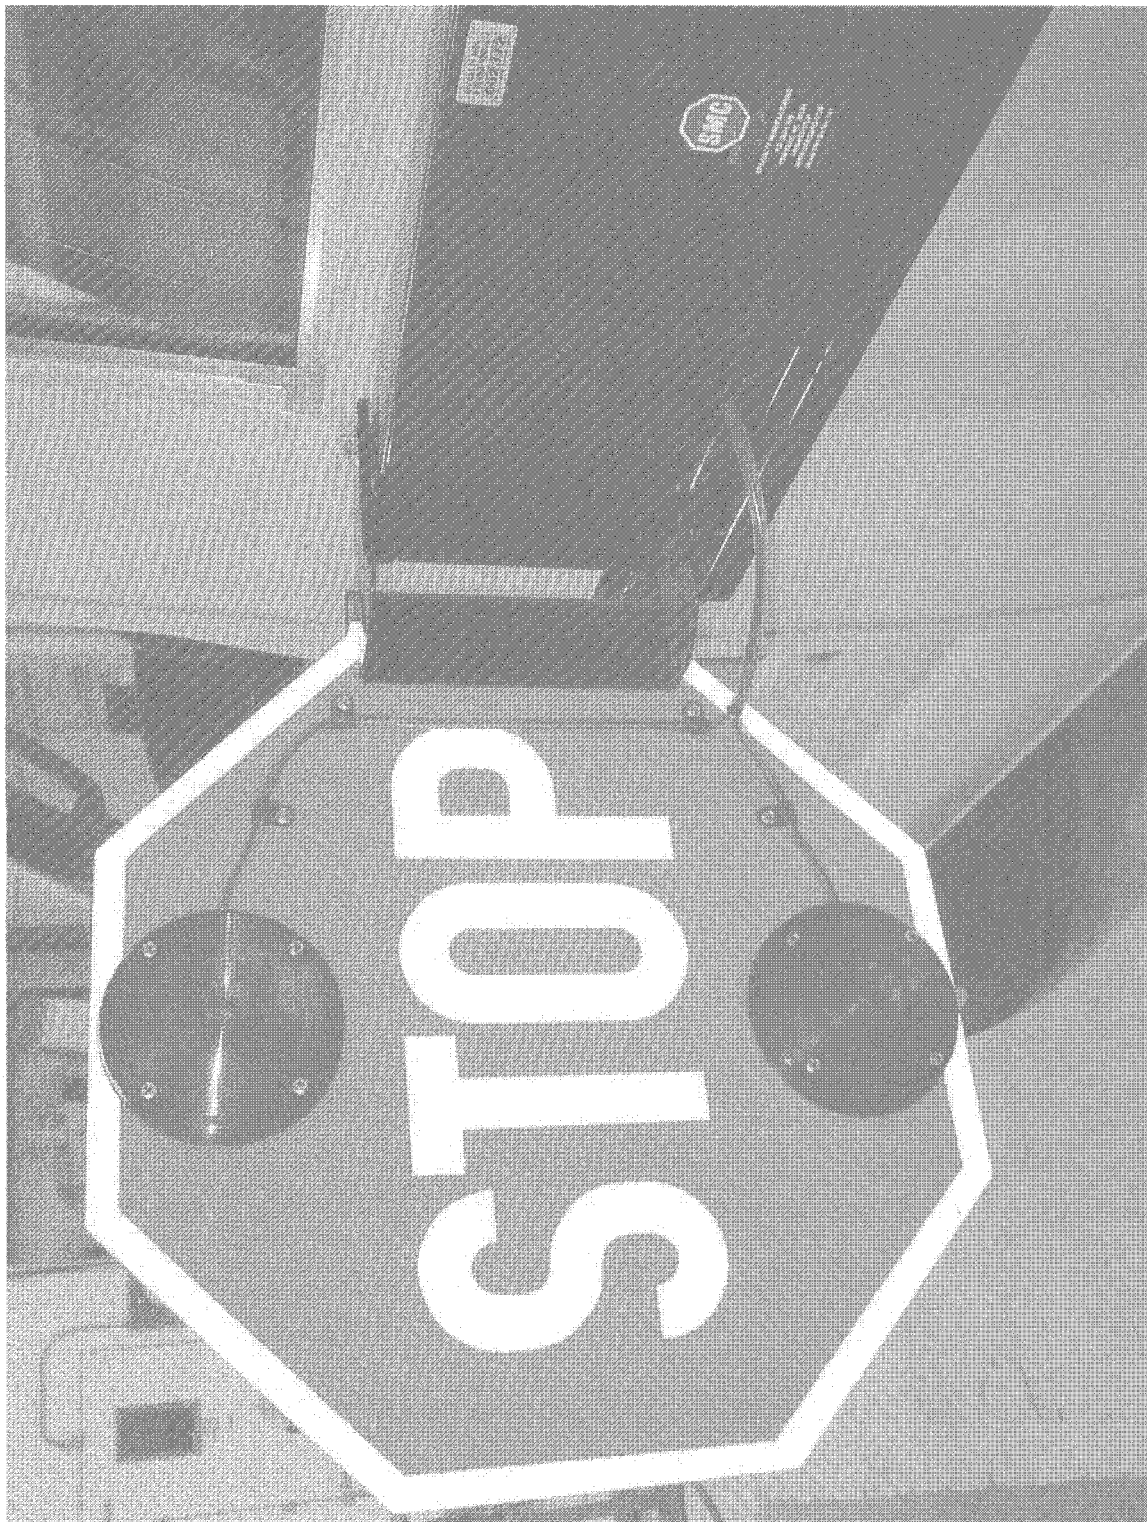

Back Close Up View of Stop Signal Arm

Test Vehicle: 2005 Girardin Mini Bus School Bus
Procedure: FMVSS 131

NHTSA No.: C50902



Close Up View of the Switches That Allow Extension of the Stop Signal Arm(s)

Test Vehicle: 2005 Girardin Mini Bus School Bus
Procedure: FMVSS 131

NHTSA No.: C50902



Switch Console Relative to the Driver Seating Position